


# Most Users Don't Get To See the Inside of Our Powerful and Reliable Smoke Machines So Here's a Sneak Preview [see over!]



- ★ More output than the "industry standard"
- ★ Physically cool with large finned aluminum body for effective heat dissipation
- ★ Modular design permits easy component replacement (should you ever need to)
- ★ Remote control included (now, who else does that?)
- ★ DMX 512 and 0-10 volt analog control inputs are fitted as standard
- ★ Smoke fluid level indicator
- ★ Quick Fire button instantly produces MAXIMUM output when you want it FAST!

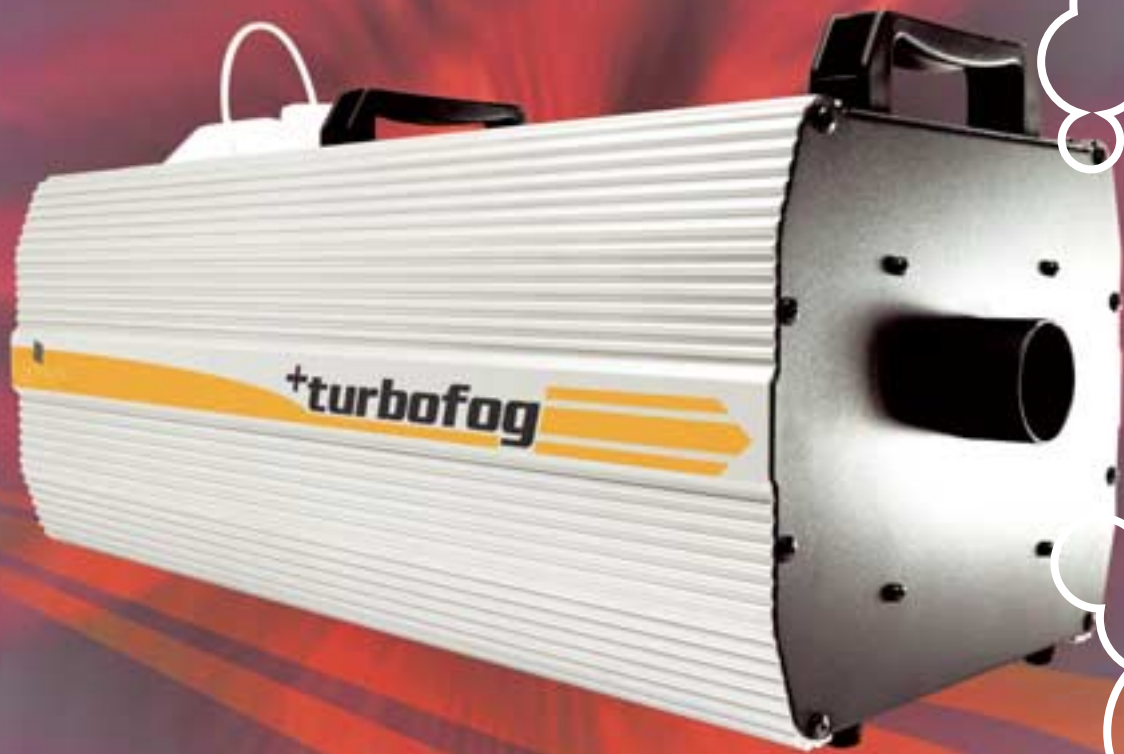

More smoke  
than the  
"industry standard"

# Specifications

Turbofog +  
Turbofog +



## Fog Generating Department

- More fog than the "industry standard" ★ ★
- Heating element size (in watts) 1000W 1500W
- Turbofog "Blast" quick fire button (produces copious quantities of thick fog on demand) ★ ★
- Variable output ★ ★
- Fluid level indicator ★ ★
- Thermal sensor ensures power is supplied to heater when required ★ ★

## Control & Safety Department

- Full-function remote control ★ ★
- DMX 512 Control Input ★ ★
- Positive DIP switch address setting ★ ★
- Positive connect XLRs (both analog and DMX In / Out) for synchronization of multiple machines. ★ ★
- Analog Input (0 ~ 10VDC) ★ ★
- Neon power indicator with electrical protection ★ ★
- Thermal shutdown overheat protection ★ ★

## Remote Control Department

- Strong ABS contoured control unit supplied with 32 feet (10M) of control cable. ★ ★
- Rotary controls determine variable output, duration of output and interval between output ★ ★
- Buttons for Timers On / Off, Fog On / Off and instantaneous Turbofog "Blast" ★ ★
- LED signal for timers, machine on and heater ready ★ ★

## Reliability & Servicing Department

- Removable side panels for easy access ★ ★
- Large bore tubes for clog free performance ★ ★
- Heavy duty pump ★ ★
- One piece heater block assembly ★ ★

## Weights, Dimensions & Warranty


Dimensions:	22½ x 9¼ x 9¼ inches (57 x 23.5 x 23.5 cms)		
Weight:	Pounds	26	32
	Kilograms	11.8	14.5
Fluid Capacity	1 US Gallon (3.88L) Container	★	★
Warranty:	2 year limited		



Illuminated On / Off switch  
Circuit breaker  
4 pin XLR connectors for remote and analog input

Large grab handles  
Easily replaced one piece heater block  
Reset safety switch to protect against over temperature  
Ceramic temperature sensor adds a second level of over temperature security

5 pin XLR connectors for DMX 512 in / out  
DMX address switches  
Fluid level indicator

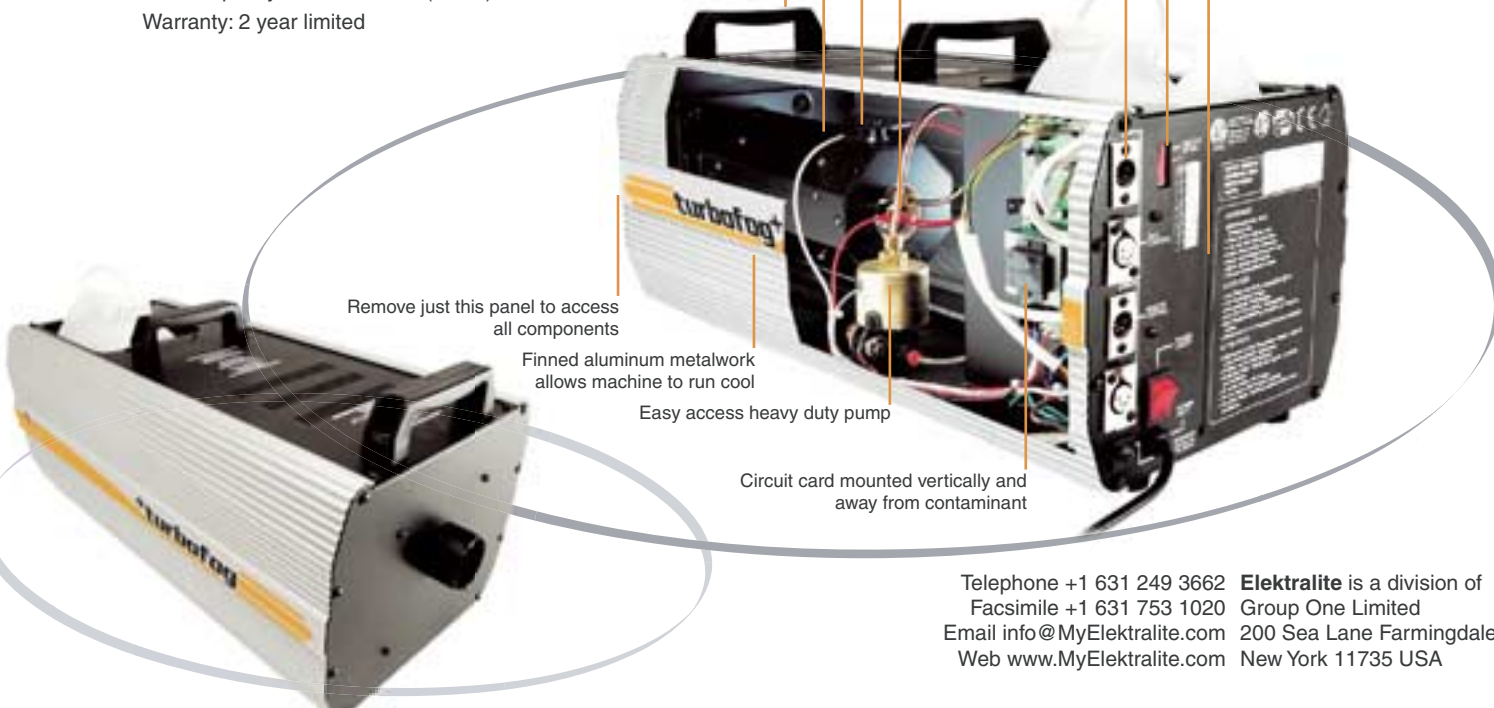

Remove just this panel to access all components

Finned aluminum metalwork allows machine to run cool

Easy access heavy duty pump

Circuit card mounted vertically and away from contaminant

Telephone +1 631 249 3662 **Elektralite** is a division of  
Facsimile +1 631 753 1020 Group One Limited  
Email info@MyElektralite.com 200 Sea Lane Farmingdale  
Web www.MyElektralite.com New York 11735 USA